

IN THE COUNTY COURT  
OF  
SEBASTIAN COUNTY, ARKANSAS

FILED

FEB 26 2019

SHARON BROOKS  
Sebastian County Clerk & Recorder  
BY *DS*

IN THE MATTER OF THE ACCEPTANCE AND APPROVAL  
OF TWO (2) TRI-AXLE DUMP TRUCKS FOR THE  
SEBASTIAN COUNTY ROAD DEPARTMENT, BID SC-1901

ORDER

On this 11th day of February, 2019, there comes before the Court the matter of the purchase of two (2) tri-axle dump trucks for the Sebastian County Road Department.

The Court finds that in accordance with Title 14-22-101 of the Arkansas Code, a Notice to Bidders was published in the Times Record on the 13th day of January, 2019 and the Proof of Publication was filed with the Court.

The Court further finds that sealed bids were received by the County Court until 2:00 p.m. on the 31st day of January, 2019, at which time bids were opened and read at the Quorum Courtroom #204, 35 South 6th Street, Fort Smith, Arkansas.


The Court further finds that the lowest and most responsive bid to be \$193,500, with a firm trade-in of \$37,000 for two (2) 2019 International HV513 Dump Trucks and a 36-month warranty, by Carco International, Incorporated of Fort Smith, Arkansas.

The Court further finds that the balance in the Road Department Fund 2000, Department 0200, Line Item 4005 has sufficient funds to cover this purchase.

The Court further finds that the bid submitted by Carco International, Incorporated of Fort Smith, Arkansas in the amount of \$193,500.00 is in the best interest of the County and should be accepted and approved by the Court.

IT IS THEREFORE BY THE COURT CONSIDERED, ORDERED AND ADJUDGED that the purchase of two (2) tri-axle dump trucks, from Carco International, Incorporated of Fort Smith, Arkansas for a total bid of \$193,500, should be and is hereby accepted and approved.

Witness my hand this 11th day of February, 2019.

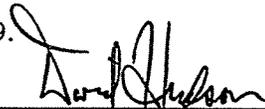

DAVID HUDSON  
SEBASTIAN COUNTY JUDGE

Attachment(s): Carco International Inc. RFP  
Bid Tab Sheet

# REQUEST FOR PROPOSAL

Sebastian County, Arkansas

COVER SHEET

SECTION I

**BID NUMBER:** SC-1901

**TITLE:** Two (2) Tri Axle Dump Truck

**Pre-Bid Meeting:** Date: January 18, 2019  
(Not Mandatory) Time: 2:30 p.m.  
Place: Road Department  
201 South Coker Street  
Greenwood, Arkansas

**OPENING:** DATE: January 31, 2019  
TIME: 2:00 p.m.  
PLACE: Purchasing Department  
35 South 6<sup>th</sup> Street, Room 106  
Fort Smith, Arkansas

**MAIL SEALED PROPOSALS TO:** Sebastian County Purchasing Department  
35 South 6<sup>th</sup> Street, Room 106  
Fort Smith, Arkansas 72901

**ON OUTSIDE OF PROPOSAL SHOW:** (1) Return Address  
(2) Bid Opening Date  
(3) Bid Number and Title

**Bidder must complete the following information:**

Name of Bidder: Carco International, Inc.  
Address: 2721 Midland Blvd.  
City/State/Zip Code: Fort Smith, AR 72904  
Telephone Number: 479-441-3270 Fax Number: 479-441-3273  
E-Mail Address: efogel@carcoint.com

**Instructions:**

- (1) Unit prices and extensions are required on proposal form
- (2) Return **three** copies of **entire** Request for Proposal
- (3) Proposals must be signed to be accepted
- (4) Any trade discounts should be deducted and net prices shown
- (5) Bidder must guarantee product(s) offered will meet or exceed specifications contained in this Request for Proposal
- (6) Bidding procedures will be in compliance with Arkansas Laws
- (7) Quote: F.O.B. destination
- (8) Terms: Net 30 days

# PROPOSAL FORM

**BID NO. SC-1901**

**SECTION II**

We, the undersigned, agree to furnish the products and/or services indicated below in accordance with the specifications and conditions contained herein, at the bid price shown.

It is expressly agreed and understood by and between the parties hereto, and is made a condition precedent to the entering into of any purchase agreement resulting from this invitation to bid, that the County Judge, Sebastian County, shall determine any and all questions or disputes which may arise concerning conformity to the specifications and conditions, and proposals; and the quantity, suitability, and acceptability of all items to be furnished hereunder, and his decision as to such matters shall be final, binding, and conclusive upon the parties hereto.

That this Request for Proposal and proposals submitted hereunder shall be governed by the laws of the State of Arkansas.

We, the undersigned, affirm that this proposal is made on behalf of the undersigned, and is made without collusion on the part of any person, firm or corporation; and that the conditions and other provisions have been carefully examined and are agreed to.

<u>Equipment</u>	<u>Number of Units</u>	<u>Price Per Unit</u>	<u>Total Price</u>
Tri Axle Dump Truck	2	\$ <u>133,750.00</u>	\$ <u>267,500.00</u>
Less Trade-In	2	\$ <u>37,000</u>	\$ <u>74,000</u>
Total Bid			\$ <u>193,500.00</u>

Written Amount: \$ One hundred, ninety three thousand, five hundred  
dollars

Make: International Model: HV 513

Warranty: 3 Year Delivery: Approx 110 days from order

Amounts shall be in both written form and figures. In case of a discrepancy between the written amount and the figures, the written amount will govern.

*Per Statue 26-52-410 of the Arkansas Code, "No tax shall be levied or collected upon gross receipts derived from the sale of motor vehicles to municipalities and counties or to state-supported colleges and universities or to public school districts in this state".*

Exceptions to specifications: NO  YES \_\_\_\_\_ (Attach itemized list)

From: Edward Fogel

Signature: Edward Fogel

Date: 1-30-2019

Title: Fleet Sales Rep.

**General Conditions**

1. Bidders must attend the Mandatory Pre-Bid Meeting. Bids must be received no later than the date and time set for bid opening. **Bids must be sealed.** Bids may be withdrawn, modified or corrected by the bidder after it has been submitted, provided a written request to do so is filed with the County Judge prior to the time set for opening the bid. Telegrams or letters received prior to the time set for opening the bids will be accepted and attached to the unopened bid, and the bid will be considered withdrawn, modified, corrected, or otherwise changed accordingly. **No bid may be withdrawn, modified, corrected, or otherwise changed after the time set for opening the bids.**
2. Specifications are designed to describe the type and quality of the product/services desired by the County. They are not intended to restrict bidding on any like product/service of equal or higher quality. Any exceptions to the specifications must be noted on a separate sheet by reference to the item number in the specifications where the exception is taken. If no exceptions are submitted with the Proposal, and accepted by the County, bidders will be expected to comply with the specifications. Products and/or services will be inspected for compliance prior to acceptance.
3. Prices quoted will be considered net prices, unless otherwise stated by the bidder in the proposal. Bid prices must remain firm for 60 days, unless otherwise stated in the specifications.
4. It shall be understood and agreed that any material or product purchased under this bid shall be new and in first class condition unless otherwise stated in or required by the bid invitation.
5. Bid bonds are not required, unless specifically required by law or specified in the bid invitation.
6. **Bids must be signed to be accepted.** Signature must be that of the individual authorized to obligate the bidder whom is submitting the bid or proposal.
7. The County is exempt from Federal Excise Taxes and such taxes shall not be included in the bid price. An exemption certificate will be furnished where required.
8. State and Local Sales Taxes shall be stated as a separate item and shall not be included in the bid price of the product/services being proposed. If no taxes are so stated, the County will assume that any taxes due have been included in the price quoted and no additional taxes will subsequently be added to the bid price. The County is Sales Tax Exempt on motor vehicle purchases.
9. **Bids will be evaluated based upon compliance with the specifications, bid price, applicability, and suitability of the product/services being offered. Product and vendor reliability, warranty, delivery time, and such other factors deemed appropriate will be considered to assure the County receives a quality product most advantageous vendor to the county.** Assignment of any part or all of payments accruing under contracts or purchase agreements resulting from this Invitation to Bid will not be authorized. Payment shall only be made to the Contractor or vendor with whom the order is placed.
10. All questions or requests for clarification shall be submitted in writing via email at [purchasing@co.sebastian.ar.us](mailto:purchasing@co.sebastian.ar.us) or mail at 35 South 6<sup>th</sup> Street Room 106, Fort Smith, AR 72901, ATTN: Purchasing Department.
11. The County reserves the right to accept part or all of any specific bid or bids and to accept any bid or bids with or without trade-in, whichever is most advantageous to the County.
12. The Sebastian County Judge reserves the right to reject any or all bids/proposals, to accept any deemed most advantageous to the County, and to waive any formalities.

**General Specification**

1. All vehicles furnished to Sebastian County shall be new and delivered as specified in the Request for Proposal. Vehicles shall be furnished with all interior, exterior trim and appointments listed by the manufacturer in printed specifications and literature as standard equipment. Vehicles shall also be equipped with any and all safety equipment required by the State and applicable Federal Regulations. Any upgrades and/or additional equipment necessitated by selection of any listed option by the ordering entity shall be included in the prices bid, and no additional charge shall be made by the vendor.
2. Warranty - From date of delivery, each vehicle shall be accompanied by a warranty for a minimum of twenty-four (24) months or two-hundred and fifty-thousand (250,000) miles, whichever comes first. Warranty shall certify that the vehicle is of good material and workmanship and that the replacement of any part or parts that fail under normal use within the designated period, free of negligence or accident, will be promptly repaired or replaced at NO cost to the County.
3. Responsibility for Inspection - Unless otherwise specified, the successful bidder will be responsible for performing all inspections required herein. The County reserves the right to make any and all inspections deemed necessary to insure compliance with this specification.
4. Each vehicle shall be completely serviced, cleaned, and thoroughly inspected by the successful bidder just prior to delivery to the County. No dealer advertisement shall be on any vehicle purchased by the County.
5. Delivery - Projected delivery time shall be stated on the Proposal Form in the space provided. The times must be realistic and failure to meet delivery times could be cause for cancellation of the order if delays have an adverse impact on the County.
6. Literature - Bidders shall include descriptive literature on all vehicles being proposed to facilitate evaluation of the proposals.
7. Specifications - The specifications are intended to describe the type and quality of vehicle desired by the County. Any substitutions must be addressed by the bidder on a separate page attached to the Proposal Form and must reference the paragraph where the substitution is made. Any substitution must be of equal or higher quality than what was specified. Items that are standard equipment shall be included whether or not specifically addressed in the specifications.
8. Trade-In - When trade-ins are offered on the proposed purchase, bidders must include a trade-in allowance on their proposal form.

**Pre Delivery Requirements**

- Complete lubrication
- Fill crankcase with oil
- Adjustment of engine to proper operating conditions
- Inflate tires to proper pressure
- Careful check to assure perfect operation of all mechanical features
- Front end alignment and wheel balance
- Cleaning of vehicle, if necessary, and removal of all unnecessary tags, stickers, papers, etc.  
**Window price sticker shall not be removed.**
- No dealer's insignia shall be affixed to vehicle
- A minimum of five (5) gallons of fuel in each vehicle
- Delivery shall be during normal working hours, 8 a.m. to 4 p.m., Monday thru Friday

**Specifications: Dump Truck Cab & Chassis****Specifications: Dump Truck Cab & Chassis**

1. **Model:** New 2019 or later model
2. **Quantity:** Two (2)
3. **Maximum GVWR:** Not less than 52,000 pounds
4. **Tires:** Front - Two (2) 385 65R 22.5, 14 Ply Highway Tread (or equivalent); Rear – Ten (10) lug grip radial 11R 22.5, 14 Ply (or equivalent).
5. **Wheels:** Thirteen (13) steel disc 22.5" diameter – 8 1/4" rim section, include one extra wheel to be used as a spare, painted white
6. **Diesel Engine:** Shall be equipped with diesel engine with full flow oil filter, dry type air cleaner, 12 volt electrical equipment with maintenance free batteries with not less than 455 cold cranking amps each at 0 degrees F; not less than 150 amps alternator. Block heater; anti-freeze protected to -20 degrees F. Engine shall not be less than 405 H.P. Minimum with 1450 torque LB. FT. An engine braking system is required.
7. **Exhaust System:** Vertical muffler and exhaust system shall be on right side. Muffler and stack must allow for dumping without hitting stack. Exhaust must have a short turn out Pipe. **Each manufacturer must show drawings of how the DPF System will be located or installed and show back of cab interference.** If using an under frame DPF system, please specify clearance to ground: 14"
- ✓ 8. **Cooling System:** As regularly furnished by the manufacturer for use with the engine size required above and shall support automatic transmission.
- ✓ 9. **Front Axle:** I beam with a capacity of not less than 20,000 lbs with shocks.
10. **Bumper:** Manufacturer installed bumper
11. **Tow Hooks:** TWO REAR-Rear tow hooks shall be installed to accommodate installation of a rear Chipper Hitch. Chipper Hitch will be installed by Sebastian County. Front and rear tow hooks will be installed by vendor and frame mounted.
12. **Steering:** Hydraulic actuated power steering rated for a 20,000 pound front axle capacity.
- ✓ 13. **Transmission:** Shall be Allison 4500 automatic or equivalent transmission that shall be programmed in performance mode.
14. **Rear Axle:** Tandem with power divider and inter-axle differential with lockout. Shall match engine and transmission and have a capacity of not less than 44,000 pounds. Ratio to match transmission and engine, to be determined jointly. Equipped with transverse torque arm.
15. **Third Axle:** Pusher Steerable 1100 W/10H, installed. This must be factory option or equivalent.
16. **Brakes:** Full air operated two-shoe type or anti-skid. Factory installed, not less than 18 CFM Compressor. Drain cocks on tanks. Parking brake with dust control. Heated air drier. Automatic slack adjuster. Four (4) brake chamber on rear axles.

17. **Springs:** Front springs shall have a capacity at pad of not less than 20,000 pounds minimum. Rear springs shall have a capacity at pad of not less than 44,000 pounds minimum. With minimum of 52" walking beam, on a 40,000 pounds Camel Back Suspension or equivalent.
18. **Frame:** Section modulus and yield strength of frame material shall provide RBM of not less than 2,500,000 pounds.
19. **Cab:** Air Ride Cab shall meet requirements of Federal Register Standards and be as regularly furnished by manufacturer complete with all insulation and interior trim.
  - Driver Seat – One (1) Bostrom air suspension, high back
  - Passenger Seat – One (1) fixed
  - Seat belts – (orange color seatbelts are preferred)
  - Factory installed fresh air heater-defroster unit
  - Factory installed Air Conditioning
  - Key type locks on both doors
  - Right and left sunshades
  - Dual West Coast senior type mirrors, not less than 6"x16" with adjustable brackets
  - Dual electric two-speed windshield wipers with washers
  - Air Horn
  - Map pocket in left hand door
  - AM/FM radio
20. **Turn Signal:** Shall be equipped with Class A directional turn signals with self-canceling switch if possible, and hazard flasher switch. Front transistorized turn signals. Rear signals to be wired for stop and tail lights in addition to directional signals.
21. **Fuel Tank:** Two (2) fuel tanks, frame mounted, not less than 50 gallon capacity each. Step type tanks with standard fill cap. Tanks will have a minimum diameter of 22 inches. Sebastian County would consider one tank with a minimum capacity of 70 gallons.
22. **Color:** Forest Green with clear coat as offered by manufacturer.
23. **Extended Warranty:** Trucks and any options purchased under this specification shall have full bumper to bumper Warranty for a period of thirty six (36) months from date of delivery with the exception of glass, tires, oils, filters, mud flaps, seats, brake shoes, accident, and any accessories added by the County. Warranty shall include parts, labor, and transportation, including service calls / mileage charges. The excluded items shall be warranted if there is a manufacturer defect such as to cause damage to these items. Repairs shall be completed within five (5) business days of notification by the County, with the understanding that a "business day" is Monday through Friday and any nationally recognized holiday that occurs on a business day will be added to the repair period, or a "loaner" shall be provided at no expense to Sebastian County. If no loaner is available, the county shall charge a rental sum at the current rental rate to the vendor and the rental vehicle shall be comparable to vehicle being repaired, or approved by the Road Department as suitable for the required County project.
24. **Service and Parts Manuals:** A service and parts manual is required for each vehicle purchased. The manual shall include wiring diagrams.
25. **Mirrors:** Non Electric base models prefer all steel.

**Specifications: Dump Bed**

1. **Minimum Size:** 10-gauge standard
2. **Minimum Capacity:** 16-18 yards

3. **Body Length:** 15 feet
4. **Distance from Cab:** minimum of 6-inches
5. **Headache Rack:** Shall cover 75% of cab and welded full width of body at junction with dump body and not be less than 42 inches in length.
6. **Tailgate:** Shall be double acting type with upper hinges of offset type to assure closing of gate. Lower pivot point of tailgate shall pivot in brackets and shall be held in place by tailgate control hooks.
7. **Bed Apron:** Shall be fitted, installed and painted prior to delivery as to accommodate Sebastian County's needs. Bed apron shall be 12 inches.
8. **Side Boards:** Shall be 8 inch minimum wood.
9. **Hydraulic Hoist:** Twin arm or telescoping type acceptable. Shall have capacity of not less than 25 tons. Hoist shall control the position of the body through the entire dumping angle. The hoist shall be stopped automatically when body reaches the maximum dumping angle and retain its position until released.
10. **Hydraulic Pump:** Shall be of the manifold type and oil tracts be cored or of seamless tubing. The pump shall be so designed to compensate for end thrust and the shafts shall turn on anti-friction roller bearings. The pump shaft packing shall be of the automatic self-adjusting seal type eliminating the necessity of packing nuts and glands.
11. **Power Take-Off:** Power take-off and parts furnished shall be sufficient strength to take care of power required to operate hoist. Shut-off valve on hydraulic tank and bleeder valve or oil level valve.
12. **Controls:** (PTO engage shall be air operated) Controls shall be lever controlled.
13. **Dump Body Color:** Shall be gray.
14. **Tarp System:** Shall be electric, fully installed with in-cab controls, wind deflector, asphalt tarp and any cords needed. Tarp cover shall be one piece (seamless) and tarp arms shall be unbreakable aluminum arms. Tarp shall be hot asphalt rated.
15. **Additional Equipment:** All necessary bolts, nuts, washers, shafts, bearings, brackets, U-joints, hose and controls required for mounting must be supplied and in place. Shafts to be not less than 1 inch round solid. Bearings shall be pillow block type, self-aligning.
16. **Lights and Reflections:** Side marker and clearance lights shall comply with Federal Register Standards.
17. **Warranty:** Bodies purchased under this specification shall be warranted against defects in material and workmanship for the same period as the truck and chassis. Warranty shall include parts, labor and freight, as well as travel time or service call charges. The selling dealer will be responsible for ALL warranty work on ALL components installed on vehicle.

#### Trade-Ins

The following trade-in will be available for viewing at the Mandatory Pre-Bid Meeting, January 18, 2019 at 2:30 pm.

2012 International 7600 Dump Truck 1HTGRSHR6CJ596008  
 2012 International 7600 Dump Truck 1HTGRSHR2CJ596006

*9-20-11 @ 97,988*



**HV513 SFA**

Sales Proposal For:  
**Sebastian County Judge**

Presented By:  
**CARCO INTL INC**

**Prepared For:**  
Sebastian County Judge  
Jim Carter  
35 S 6th St  
Fort Smith, AR 72901-2442  
(479)784 - 1502  
Reference ID: N/A

**Presented By:**  
CARCO INTL INC  
Edward Z Fogel  
2721 MIDLAND BLVD  
FORT SMITH AR 72904 -  
(479)441-3270

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

**Model Profile**  
**2020 HV513 SFA (HV513)**

<b>AXLE CONFIG:</b>	6X4
<b>APPLICATION:</b>	Construction Dump
<b>MISSION:</b>	Requested GVWR: 52000. Calc. GVWR: 65220 Calc. Start / Grade Ability: 30.07% / 2.45% @ 55 MPH Calc. Geared Speed: 98.0 MPH
<b>DIMENSION:</b>	Wheelbase: 219.00, CA: 135.50, Axle to Frame: 57.00
<b>ENGINE, DIESEL:</b>	{International A26} EPA 2017, 410HP @ 1700 RPM, 1450 lb-ft Torque @ 1000 RPM, 2100 RPM Governed Speed, 410 Peak HP (Max)
<b>TRANSMISSION, AUTOMATIC:</b>	{Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
<b>CLUTCH:</b>	Omit Item (Clutch & Control)
<b>AXLE, FRONT NON-DRIVING:</b>	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
<b>AXLE, REAR, TANDEM:</b>	{Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, Driver Controlled Locking Differential in Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 3.91
<b>CAB:</b>	Conventional
<b>TIRE, FRONT:</b>	(2) 385/65R22.5 Load Range L HTC1 (CONTINENTAL), 495 rev/mile, 68 MPH, All-Position
<b>TIRE, REAR:</b>	(8) 11R22.5 Load Range H HDR2 (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
<b>SUSPENSION, REAR, TANDEM:</b>	{Hendrickson RT-463} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Multileaf Springs, with Bronze Center Bushings
<b>PAINT:</b>	Cab schematic 100WM Location 1: 5128, Green (Prem) Chassis schematic N/A

<u>Description</u>	<u>(US DOLLAR)</u>	<u>Price</u>
Factory List Prices:		
Product Items	\$232,069.00	
Service Items	\$8,250.00	
Total Factory List Price Including Options:		\$240,319.00
Total Goods Purchased:		\$900.00
clean and prep for delivery	\$500.00	
Total Preparation And Delivery:		\$500.00
Freight	\$2,250.00	
Total Freight:		\$2,250.00
Total Factory List Price Including Freight:		\$243,969.00
Less Customer Allowance:		(\$130,469.00)
Total Vehicle Price:		\$113,500.00
Total Body/Allied Equipment:		\$20,250.00
Total Sale Price:		\$133,750.00
Total Per Vehicle Sales Price:		\$133,750.00
Total For 2 Vehicle Sales:		\$267,500.00
Less Trade-In Allowance:		(\$74,000.00)
Net Sales Price:		\$193,500.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

**Approved by Seller:**

**Accepted by Purchaser:**

\_\_\_\_\_  
**Official Title and Date**

\_\_\_\_\_  
**Firm or Business Name**

\_\_\_\_\_  
**Authorized Signature**

\_\_\_\_\_  
**Authorized Signature and Date**

**This proposal is not binding upon the seller without  
Seller's Authorized Signature**

\_\_\_\_\_  
**Official Title and Date**

**The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.**

<u>Code</u>	<u>Description</u>
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power
6DDC	DRIVESHAFT SYSTEM SPL250XL Driveshaft and SPL170XL Interaxle Shaft in lieu of 1810 Driveshaft and 1710 Interaxle Shaft
7BEV	AFTERTREATMENT COVER Steel, Black
7BKS	EXHAUST SYSTEM Single Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab; for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab
7SDK	ENGINE COMPRESSION BRAKE by Jacobs; for N13/A26 Engines, with Selector Switch and On/Off Switch
7WAZ	TAIL PIPE (1) Turnback Type, Non-Bright, for Single Exhaust
7WCR	EXHAUST HEIGHT 10' 11"
7WDN	MUFFLER/TAIL PIPE GUARD (1) Non-Bright Aluminum
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u>
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: STARTER SWITCH Electric, Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8GXJ	ALTERNATOR {Leece-Neville AV1160P2013} Brush Type; 12 Volt 160 Amp. Capacity, Pad Mount
8HAE	BODY BUILDER WIRING Rear of Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/ Accessory Power/Ground and Sealed Connector for Stop/Turn
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud
8RML	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/3.5MM Auxiliary Input, MP3, Apple Device Play & Control, Bluetooth for Phone & Music
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors
8RNB	CB RADIO Accommodation Package; Header Mounted; Feeds From Accessory Side of Ignition Switch; Includes Power Source and One (1) Antenna, Antenna Base with Wiring on Left Side Mirror
8VAY	HORN, ELECTRIC Disc Style
8VUJ	BATTERY BOX Steel, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights
8WTL	STARTING MOTOR {Delco Remy 39MT} 12 Volt; Gear Reduced, with Thermal Over-Crank Protection
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender
8XHN	HORN, AIR Black, Single Trumpet, with Lanyard Pull Cord
9585	FENDER EXTENSIONS Rubber

<u>Code</u>	<u>Description</u>
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power
6DDC	DRIVESHAFT SYSTEM SPL250XL Driveshaft and SPL170XL Interaxle Shaft in lieu of 1810 Driveshaft and 1710 Interaxle Shaft
7BEV	AFTERTREATMENT COVER Steel, Black
7BKS	EXHAUST SYSTEM Single Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab; for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab
7SDK	ENGINE COMPRESSION BRAKE by Jacobs; for N13/A26 Engines, with Selector Switch and On/Off Switch
7WAZ	TAIL PIPE (1) Turnback Type, Non-Bright, for Single Exhaust
7WCR	EXHAUST HEIGHT 10' 11"
7WDN	MUFFLER/TAIL PIPE GUARD (1) Non-Bright Aluminum
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u>
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: STARTER SWITCH Electric, Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8GXJ	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type; 12 Volt 160 Amp. Capacity, Pad Mount
8HAE	BODY BUILDER WIRING Rear of Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/ Accessory Power/Ground and Sealed Connector for Stop/Turn
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud
8RML	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/3.5MM Auxiliary Input, MP3, Apple Device Play & Control, Bluetooth for Phone & Music
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors
8RNB	CB RADIO Accommodation Package; Header Mounted; Feeds From Accessory Side of Ignition Switch; Includes Power Source and One (1) Antenna, Antenna Base with Wiring on Left Side Mirror
8VAY	HORN, ELECTRIC Disc Style
8VUJ	BATTERY BOX Steel, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights
8WTL	STARTING MOTOR {Delco Remy 39MT} 12 Volt; Gear Reduced, with Thermal Over-Crank Protection
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender
8XHN	HORN, AIR Black, Single Trumpet, with Lanyard Pull Cord
9585	FENDER EXTENSIONS Rubber

<u>Code</u>	<u>Description</u>
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges
9HBM	GRILLE Stationary, Chrome
9HBN	INSULATION, SPLASH PANELS for Sound Abatement
9WBK	FRONT END Tilting, Fiberglass, with Three Piece Construction Includes Long Hood
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "WM"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10769	PAINT CLASS Premium Color
10BAE	LABEL, DEF "DEF ONLY"
10XAP	FIRE EXTINGUISHER BRACKET Mounted Left Side Driver Seat
11001	CLUTCH Omit Item (Clutch & Control)
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12BEA	ENGINE, DIESEL {International A26} EPA 2017, 410HP @ 1700 RPM, 1450 lb-ft Torque @ 1000 RPM, 2100 RPM Governed Speed, 410 Peak HP (Max)
12THT	FAN DRIVE {Horton Drivemaster} Direct Drive Type, Two Speed with Residual Torque Device for Disengaged Fan Speed
	<u>Includes</u> : FAN Nylon
12VBC	AIR CLEANER Single Element
12VHC	FEDERAL EMISSIONS {International A26} EPA, OBD and GHG Certified for Calendar Year 2019
12WEG	COLD STARTING EQUIPMENT Automatic; with Engine ECM Control
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted
12WZB	EMISSION COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood
12XBD	RADIATOR Aluminum; Welded, Front to Back CrossFlow System, 1292 SqIn, 1008 SqIn CAC
	<u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber
12XBR	BLOCK HEATER, ENGINE {Phillips} 120V/1150W
13AUW	TRANSMISSION, AUTOMATIC {Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
13WAW	OIL COOLER, AUTO TRANSMISSION {Modine} Water to Oil Type
13WET	TRANSMISSION SHIFT CONTROL for Column Mounted Stalk Shifter
13WLM	TRANSMISSION OIL Synthetic; 63 thru 76 Pints
13WJC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks, Construction
13WYH	TRANSMISSION TCM LOCATION Located Inside Cab

<u>Code</u>	<u>Description</u>
13WYU	SHIFT CONTROL PARAMETERS Allison 3000 or 4000 Series Transmissions, 5th Generation Controls, Performance Programming
13XAT	PTO LOCATION Dual, Left Side and Top of Transmission
14GRP	AXLE, REAR, TANDEM {Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, Driver Controlled Locking Differential in Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 3.91
14UHK	SUSPENSION, REAR, TANDEM {Hendrickson RT-463} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Multileaf Springs, with Bronze Center Bushings
14WAL	SUSPENSION/REAR-AXLE IDENTITY for Meritor Tandem Rear Axles with Bar-Pin Beam Attachment Type Suspensions
14WLT	AXLE, PUSHER, LIFT TYPE, ID Customer Installed Pusher Type Axle; Nothing Installed at Manufacturing Plant
14WMK	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 65 thru 89.99 Pints
14WZY	AXLE SHAFT MODIFICATION Axle Shaft Flanges Modified for 0.625" Diameter Drive Studs with Solid Type Cone-Locks
15DYP	DEF TANK 9.5 US Gal (36L) Capacity, Frame Mounted Outside Left Rail, Under Cab
15LKU	FUELWATER SEPARATOR {Racor} Fuel Pre-Filter and Filter Base, Includes Water-In-Fuel Sensor
15LLP	LOCATION FUELWATER SEPARATOR Mounted Inside Left Rail, Back of Cab
15SJR	FUEL TANK Top Draw, Non-Polished Aluminum, 26" Dia, 100 US Gal (379L), Mounted Left Side, Under Cab
16030	CAB Conventional
16BAM	AIR CONDITIONER with Integral Heater & Defroster
16GDC	GAUGE CLUSTER Base Level; English with English Speedometer and Tachometer, for Air Brake Chassis, Includes Engine Coolant Temperature, Primary and Secondary Air Pressure, Fuel and DEF Gauges, Oil Pressure Gauge, Includes 3 Inch Monochromatic Text Display
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16JNT	SEAT, DRIVER {National 2000} Air Suspension, High Back with Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, with 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust
16LUM	SEAT, PASSENGER {National} Non Suspension, High Back with Integral Headrest, Vinyl, with Fixed Back, with Under Seat Storage
16SNM	MIRRORS (2) Thermostatically Controlled Heated Heads, Black Heads, Brackets and Arms, 7.55" x 14.1" Flat Glass, 7.48" x 6.77" Convex Glass Both Sides
16VKB	CAB INTERIOR TRIM Classic, for Day Cab  <u>Includes</u> : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted : SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap
16WSK	CAB REAR SUSPENSION Air Bag Type
16XCK	WINDOW, MANUAL (2) and Manual Door Locks, Left and Right Doors
16XJP	INSTRUMENT PANEL Wing Panel
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps Per Door, for use with Regular and Extended Cabs

<u>Code</u>	<u>Description</u>
27DUN	WHEELS, FRONT {Accuride 29807} DISC; 22.5x12.25 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs, Offset 5.37"
28DUK	WHEELS, REAR {Accuride 29169} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and Steel Hubs
7382135423	(8) TIRE, REAR 11R22.5 Load Range H HDR2 (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
7792655412	(2) TIRE, FRONT 385/65R22.5 Load Range L HTC1 (CONTINENTAL), 495 rev/mile, 68 MPH, All-Position

**Services Section:**

40127	WARRANTY Standard for HV513, HV613 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2030A
40KMB	SERVICES, TOWING {Navistar} Service Call to 36-Month/Unlimited Mileage to the Nearest Navistar Dealer for Navistar Warrantable Failure as Contract Defined; Includes Engine Failure if Supplier Declines Tow Coverage & ESC Supplied thru Navistar; \$550 (USA) Maximum Benefit per Incident
40PJY	SRV CONTRACT, EXT VEH COVERAGE {Navistar} To 36-Month/100,000 Miles (160,000 km), Excludes Extended Warranty for Engine and Transmission, for Rear Axle Rating of 52,000 lbs or less
40STU	SRV CONTRACT, EXT ENGINE/AFTR {Navistar} To 36-Month/300,000 Miles (480,000 km), Includes Engine, Engine Electronics, Turbocharger, Water Pump and Fuel Injectors, Aftertreatment Coverage for International A26 Engines
1	16' dump body, steerable pusher axle, install with tires / wheels

Tires and wheels for pusher axle



**HV513 SFA**

Sales Proposal For:  
**Sebastian County Judge**

Presented By:  
**CARCO INTL INC**

**Prepared For:**  
 Sebastian County Judge  
 Jim Carter  
 35 S 6th St.  
 Fort Smith, AR 72901-2442  
 (479)784 - 1502  
 Reference ID: N/A

**Presented By:**  
 CARCO INTL INC  
 Edward Z Fogel  
 2721 MIDLAND BLVD  
 FORT SMITH AR 72904 -  
 (479)441-3270

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

**Model Profile**  
**2020 HV513 SFA (HV513)**

<b>AXLE CONFIG:</b>	6X4
<b>APPLICATION:</b>	Construction Dump
<b>MISSION:</b>	Requested GVWR: 52000. Calc. GVWR: 65220 Calc. Start / Grade Ability: 30.07% / 2.45% @ 55 MPH Calc. Geared Speed: 98.0 MPH
<b>DIMENSION:</b>	Wheelbase: 219.00, CA: 135.50, Axle to Frame: 57.00
<b>ENGINE, DIESEL:</b>	{International A26} EPA 2017, 410HP @ 1700 RPM, 1450 lb-ft Torque @ 1000 RPM, 2100 RPM Governed Speed, 410 Peak HP (Max)
<b>TRANSMISSION, AUTOMATIC:</b>	{Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
<b>CLUTCH:</b>	Omit Item (Clutch & Control)
<b>AXLE, FRONT NON-DRIVING:</b>	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
<b>AXLE, REAR, TANDEM:</b>	{Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, Driver Controlled Locking Differential in Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 3.91
<b>CAB:</b>	Conventional
<b>TIRE, FRONT:</b>	(2) 385/65R22.5 Load Range L HTC1 (CONTINENTAL), 495 rev/mile, 68 MPH, All-Position
<b>TIRE, REAR:</b>	(8) 11R22.5 Load Range H HDR2 (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
<b>SUSPENSION, REAR, TANDEM:</b>	{Hendrickson RT-463} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Multileaf Springs, with Bronze Center Bushings
<b>PAINT:</b>	Cab schematic 100WM Location 1: 5128, Green (Prem) Chassis schematic N/A

<u>Description</u>	<u>(US DOLLAR)</u>	<u>Price</u>
Factory List Prices:		
Product Items	\$232,069.00	
Service Items	\$8,250.00	
Total Factory List Price Including Options:		\$240,319.00
Total Goods Purchased:		\$900.00
clean and prep for delivery	\$500.00	
Total Preparation And Delivery:		\$500.00
Freight	\$2,250.00	
Total Freight:		\$2,250.00
Total Factory List Price Including Freight:		\$243,969.00
Less Customer Allowance:		(\$130,469.00)
Total Vehicle Price:		\$113,500.00
Total Body/Allied Equipment:		\$20,250.00
Total Sale Price:		\$133,750.00
Total Per Vehicle Sales Price:		\$133,750.00
Total For 2 Vehicle Sales:		\$267,500.00
Less Trade-In Allowance:		(\$74,000.00)
Net Sales Price:		\$193,500.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

**Approved by Seller:**

**Accepted by Purchaser:**

\_\_\_\_\_  
**Official Title and Date**

\_\_\_\_\_  
**Firm or Business Name**

\_\_\_\_\_  
**Authorized Signature**

\_\_\_\_\_  
**Authorized Signature and Date**

**This proposal is not binding upon the seller without Seller's Authorized Signature**

\_\_\_\_\_  
**Official Title and Date**

**The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.**

<u>Code</u>	<u>Description</u>
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power
6DDC	DRIVESHAFT SYSTEM SPL250XL Driveshaft and SPL170XL Interaxle Shaft in lieu of 1810 Driveshaft and 1710 Interaxle Shaft
7BEV	AFTERTREATMENT COVER Steel, Black
7BKS	EXHAUST SYSTEM Single Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab; for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab
7SDK	ENGINE COMPRESSION BRAKE by Jacobs; for N13/A26 Engines, with Selector Switch and On/Off Switch
7WAZ	TAIL PIPE (1) Turnback Type, Non-Bright, for Single Exhaust
7WCR	EXHAUST HEIGHT 10' 11"
7WDN	MUFFLER/TAIL PIPE GUARD (1) Non-Bright Aluminum
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u>
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: STARTER SWITCH Electric, Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8GXJ	ALTERNATOR {Leece-Neve AV1160P2013} Brush Type; 12 Volt 160 Amp. Capacity, Pad Mount
8HAE	BODY BUILDER WIRING Rear of Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/ Accessory Power/Ground and Sealed Connector for Stop/Turn
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud
8RML	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/3.5MM Auxiliary Input, MP3, Apple Device Play & Control, Bluetooth for Phone & Music
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors
8RNB	CB RADIO Accommodation Package; Header Mounted; Feeds From Accessory Side of Ignition Switch; Includes Power Source and One (1) Antenna, Antenna Base with Wiring on Left Side Mirror
8VAY	HORN, ELECTRIC Disc Style
8VUJ	BATTERY BOX Steel, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights
8WTL	STARTING MOTOR {Delco Remy 39MT} 12 Volt; Gear Reduced, with Thermal Over-Crank Protection
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender
8XHN	HORN, AIR Black, Single Trumpet, with Lanyard Pull Cord
9585	FENDER EXTENSIONS Rubber

<u>Code</u>	<u>Description</u>
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power
6DDC	DRIVESHAFT SYSTEM SPL250XL Driveshaft and SPL170XL Interaxle Shaft in lieu of 1810 Driveshaft and 1710 Interaxle Shaft
7BEV	AFTERTREATMENT COVER Steel, Black
7BKS	EXHAUST SYSTEM Single Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab; for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab
7SDK	ENGINE COMPRESSION BRAKE by Jacobs; for N13/A26 Engines, with Selector Switch and On/Off Switch
7WAZ	TAIL PIPE (1) Turnback Type, Non-Bright, for Single Exhaust
7WCR	EXHAUST HEIGHT 10' 11"
7WDN	MUFFLER/TAIL PIPE GUARD (1) Non-Bright Aluminum
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u>
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: STARTER SWITCH Electric; Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8GXJ	ALTERNATOR {Leece-Neville AV160P2013} Brush Type; 12 Volt 160 Amp. Capacity, Pad Mount
8HAE	BODY BUILDER WIRING Rear of Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/ Accessory Power/Ground and Sealed Connector for Stop/Turn
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud
8RML	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/3.5MM Auxiliary Input, MP3, Apple Device Play & Control, Bluetooth for Phone & Music
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors
8RNB	CB RADIO Accommodation Package; Header Mounted; Feeds From Accessory Side of Ignition Switch; Includes Power Source and One (1) Antenna, Antenna Base with Wiring on Left Side Mirror
8VAY	HORN, ELECTRIC Disc Style
8VUJ	BATTERY BOX Steel, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights
8WTL	STARTING MOTOR {Delco Remy 39MT} 12 Volt; Gear Reduced, with Thermal Over-Crank Protection
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender
8XHN	HORN, AIR Black, Single Trumpet, with Lanyard Pull Cord
9585	FENDER EXTENSIONS Rubber

<u>Code</u>	<u>Description</u>
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges
9HBM	GRILLE Stationary, Chrome
9HBN	INSULATION, SPLASH PANELS for Sound Abatement
9WBK	FRONT END Tilting, Fiberglass, with Three Piece Construction Includes Long Hood
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
	<u>Includes</u>
	: PAINT SCHEMATIC ID LETTERS "WM"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10769	PAINT CLASS Premium Color
10BAE	LABEL, DEF "DEF ONLY"
10XAP	FIRE EXTINGUISHER BRACKET Mounted Left Side Driver Seat
11001	CLUTCH Omit Item (Clutch & Control)
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12BEA	ENGINE, DIESEL {International A26} EPA 2017, 410HP @ 1700 RPM, 1450 lb-ft Torque @ 1000 RPM, 2100 RPM Governed Speed, 410 Peak HP (Max)
12THT	FAN DRIVE {Horton Drivemaster} Direct Drive Type, Two Speed with Residual Torque Device for Disengaged Fan Speed
	<u>Includes</u>
	: FAN Nylon
12VBC	AIR CLEANER Single Element
12VHC	FEDERAL EMISSIONS {International A26} EPA, OBD and GHG Certified for Calendar Year 2019
12WEG	COLD STARTING EQUIPMENT Automatic; with Engine ECM Control
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted
12WZB	EMISSION COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood
12XBD	RADIATOR Aluminum; Welded, Front to Back CrossFlow System, 1292 SqIn, 1008 SqIn CAC
	<u>Includes</u>
	: DEAERATION SYSTEM with Surge Tank
	: HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps
	: RADIATOR HOSES Premium, Rubber
12XBR	BLOCK HEATER, ENGINE {Phillips} 120V/1150W
13AUW	TRANSMISSION, AUTOMATIC {Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
13WAW	OIL COOLER, AUTO TRANSMISSION {Modine} Water to Oil Type
13WET	TRANSMISSION SHIFT CONTROL for Column Mounted Stalk Shifter
13WLM	TRANSMISSION OIL Synthetic; 63 thru 76 Pints
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks, Construction
13WYH	TRANSMISSION TCM LOCATION Located Inside Cab

<u>Code</u>	<u>Description</u>
13WYU	SHIFT CONTROL PARAMETERS Allison 3000 or 4000 Series Transmissions, 5th Generation Controls, Performance Programming
13XAT	PTO LOCATION Dual, Left Side and Top of Transmission
14GRP	AXLE, REAR, TANDEM {Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, Driver Controlled Locking Differential in Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 3.91
14UHK	SUSPENSION, REAR, TANDEM {Hendrickson RT-463} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Multileaf Springs, with Bronze Center Bushings
14WAL	SUSPENSION/REAR-AXLE IDENTITY for Meritor Tandem Rear Axles with Bar-Pin Beam Attachment Type Suspensions
14WLT	AXLE, PUSHER, LIFT TYPE, ID Customer Installed Pusher Type Axle; Nothing Installed at Manufacturing Plant
14WMK	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 65 thru 89.99 Pints
14WZY	AXLE SHAFT MODIFICATION Axle Shaft Flanges Modified for 0.625" Diameter Drive Studs with Solid Type Cone-Locks
15DYP	DEF TANK 9.5 US Gal (36L) Capacity, Frame Mounted Outside Left Rail, Under Cab
15LKU	FUEL/WATER SEPARATOR {Racor} Fuel Pre-Filter and Filter Base, Includes Water-In-Fuel Sensor
15LLP	LOCATION FUEL/WATER SEPARATOR Mounted Inside Left Rail, Back of Cab
15SJR	FUEL TANK Top Draw, Non-Polished Aluminum, 26" Dia, 100 US Gal (379L), Mounted Left Side, Under Cab
16030	CAB Conventional
16BAM	AIR CONDITIONER with Integral Heater & Defroster
16GDC	GAUGE CLUSTER Base Level; English with English Speedometer and Tachometer, for Air Brake Chassis, Includes Engine Coolant Temperature, Primary and Secondary Air Pressure, Fuel and DEF Gauges, Oil Pressure Gauge, includes 3 Inch Monochromatic Text Display
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16JNT	SEAT, DRIVER {National 2000} Air Suspension, High Back with Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, with 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust
16LUM	SEAT, PASSENGER {National} Non Suspension, High Back with Integral Headrest, Vinyl, with Fixed Back, with Under Seat Storage
16SNM	MIRRORS (2) Thermostatically Controlled Heated Heads, Black Heads, Brackets and Arms, 7.55" x 14.1" Flat Glass, 7.48" x 6.77" Convex Glass Both Sides
16VKB	CAB INTERIOR TRIM Classic, for Day Cab  <u>Includes</u> : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted : SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap
16WSK	CAB REAR SUSPENSION Air Bag Type
16XCK	WINDOW, MANUAL (2) and Manual Door Locks, Left and Right Doors
16XJP	INSTRUMENT PANEL Wing Panel
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps Per Door, for use with Regular and Extended Cabs

<b>Code</b>	<b>Description</b>
27DUN	WHEELS, FRONT {Accuride 29807} DISC; 22.5x12.25 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs, Offset 5.37"
28DUK	WHEELS, REAR {Accuride 29169} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and Steel Hubs
7382135423	(8) TIRE, REAR 11R22.5 Load Range H HDR2 (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
7792655412	(2) TIRE, FRONT 385/65R22.5 Load Range L HTC1 (CONTINENTAL), 495 rev/mile, 68 MPH, All-Position

**Services Section:**

40127	WARRANTY Standard for HV513, HV613 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2030A
40KMB	SERVICES, TOWING {Navistar} Service Call to 36-Month/Unlimited Mileage to the Nearest Navistar Dealer for Navistar Warrantable Failure as Contract Defined; Includes Engine Failure if Supplier Declines Tow Coverage & ESC Supplied thru Navistar; \$550 (USA) Maximum Benefit per Incident
40PJY	SRV CONTRACT, EXT VEH COVERAGE {Navistar} To 36-Month/100,000 Miles (160,000 km), Excludes Extended Warranty for Engine and Transmission, for Rear Axle Rating of 52,000 lbs or less
40STU	SRV CONTRACT, EXT ENGINE/AFTR {Navistar} To 36-Month/300,000 Miles (480,000 km), Includes Engine, Engine Electronics, Turbocharger, Water Pump and Fuel Injectors, Aftertreatment Coverage for International A26 Engines
1	16' dump body, steerable pusher axle, install with tires / wheels

Tires and wheels for pusher axle

# DAVIS TRAILER & TRUCK EQUIPMENT, INC.

P.O. Box 4129 • 7609 Colonel Glenn • Little Rock, Arkansas 72214-4129  
(501) 562-6295 • In Ark. 1-800-482-9484 • Out of Ark. 1-800-233-1335

January 24, 2019

Mr. Ed Fogel  
Carco International, Inc.  
2721 Midland Boulevard  
Ft. Smith, AR 72904  
Ph: 479-441-3270


RE: Sebastian County Bid No. SC-1901  
Two (2) Tri-Axle Dump Trucks

Dear Mr. Fogel:

Attached is our quote for furnishing and installing two 15' 16-18 cubic yard capacity dump bodies with heavy duty electric tarp systems and 13,200#'s rated capacity self-steering pusher suspensions on your trucks. With the requirement that the front of the dump body be a minimum of 6" from the back of the truck cab, the 15' unit is designed to fit trucks with usable measurements of 126" to 132" from the back of the truck cab to the point midway between the two rear axles. The price also includes D.O.T. triangle warning kit, 5#'s ABC fire extinguisher and rear tow hooks. The equipment as quoted meets or exceeds all specifications contained in the bid request. Delivery will be within thirty days of receiving an order from you or within fifteen working days (three weeks) of receiving each truck – whichever is longer. The price is F.O.B. your dealership in Sebastian County and assumes the trucks are drop shipped to Little Rock.


I have enclosed our brochure, current specifications on our dump body and the factory literature on the Silent Drive UF-1013 self-steering pusher suspension. I have quoted our standard unit to make our price as competitive as possible. The Silent Driver UF-1013 is an air ride, air lift, self-steering pusher suspension with a rated capacity of 13,200#'s. We install it with a 13,200#'s rated capacity air brake axle. The axle has automatic slack adjusters and outboard mounted ten hole Budd hub and drum assemblies. We also provide the automatic raise when the truck transmission is in reverse feature on all self-steering units we install. The price does not include disc wheels or tires.

I hope this information is useful. You will not have problems based on the specifications if you provide our equipment and if the specifications are enforced, our price will be very competitive. If you have questions, please call me at 1-800-233-1335 or 1-501-562-6295.

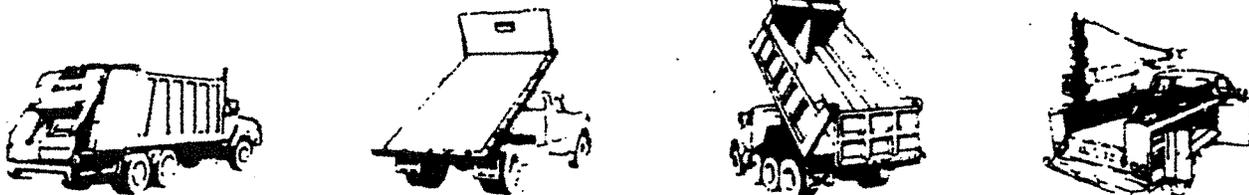

Thank you for the opportunity to quote. Good luck on winning the bid and securing the business.

Sincerely,



Chester D. Mercer  
President

CM:kl

Enclosures

# DAVIS TRAILER & TRUCK EQUIPMENT, INC.

P.O. Box 4129 • 7609 Colonel Glenn • Little Rock, Arkansas 72214-4129  
 (501) 562-6295 • In Ark. 1-800-482-9484 • Out of Ark. 1-800-233-1335

**QUOTATION NUMBER 13476**

QUOTE DATED: 01/24/19  
 EXPIRES ON: 02/28/19

**CARCO INTERNATIONAL, INC.**  
**ATTN: MR. ED FOGEL**  
**2721 MIDLAND BOULEVARD**  
**FT. SMITH, AR 72904**

**RE: SEBASTIAN COUNTY BID NO SC-1901**  
**TWO (2) TRI-AXLE DUMP TRUCKS**  
**PHONE: 479-441-3270**

**F.O.B.: LITTLE ROCK, AR**

**EMAIL: efogel@carco.com**

ENTERED BY	SALESPERSON	CONTACT	SHIP VIA	ESTIMATED DELIVERY	INVOICE TERMS
KL	CHET MERCER	MR. ED FOGEL	DELIVERED	30 DAYS ARO 15 DAYS ARC	CHECK AT COMPLETION
QTY	DESCRIPTION			UNIT PRICE	EXT PRICE
2	DAVIS FMT 15-15			20,235.00	40,470.00

DAVIS 15' 16-18 CUBIC YARD DUMP BODY  
 3/4 CAB PROTECTOR  
 (FULL WIDTH - 42" OVER CAB)  
 HEAVY DUTY AIR OPERATED TAILGATE  
 (SIX PANEL)  
 DAVIS TOWER CONTROLS  
 12" ASPHALT APRON  
 10" PAINTED PINE BOARDS  
 ALL L.E.D. LIGHTS  
 BOLT ON REFLECTORS  
 "HOT" SHIFT PTO FOR ALLISON 4500 RDS AUTOMATIC TRANSMISSION

INSIDE DIMENSIONS:  
 SIDES - 48"  
 ENDS - 54"  
 WIDTH - 89"  
 LENGTH - 15'

EQUIPPED WITH:  
 DAVIS FMT 63-130: THREE STAGE FRONT MOUNT TELESCOPIC  
 HOIST WITH 38 TONS LIFT CAPACITY (NTEA CLASS 110) - SHUT-  
 OFF VALVES IN SUCTION AND RETURN HYDRAULIC LINES

**ADDITIONAL EQUIPMENT:**

- D.O.T. TRIANGLE WARNING KIT
- 5#'S ABC FIRE EXTINGUISHER
- U.S. TARP 15042: HEAVY DUTY ELECTRIC TARP SYSTEM WITH  
 IN CAB CONTROLS, UNBREAKABLE ALUMINUM ARMS, WIND  
 DEFLECTOR AND 18 OZ VINYL/NYLON TARP
- SILENT DRIVE UF1013-FA-005: 13,200#'S RATED CAPACITY  
 AIR RIDE, AIR LIFT PUSHER SUSPENSION WITH 13,200#'S  
 RATED CAPACITY AIR BRAKE AXLE WITH AUTOMATIC SLACK  
 ADJUSTERS, AUTOMATIC RAISE WHEN TRUCK TRANSMISSION IS  
 IN REVERSE AND OUTBOARD MOUNTED TEN HOLE BUDD HUB  
 AND DRUM ASSEMBLIES

THE ABOVE EQUIPMENT MEETS OR EXCEEDS ALL  
 SPECIFICATIONS CONTAINED IN THE BID REQUEST.

ACCEPTED. The above prices, specifications and conditions are satisfactory and  
 are hereby accepted. You are authorized to do the work as specified. Payment  
 will be made as outlined above. Please refer to Quotation Number when placing  
 your order.

Date of Acceptance: \_\_\_\_\_

Firm: \_\_\_\_\_

By: \_\_\_\_\_

*DM*

# DAVIS TRAILER & TRUCK EQUIPMENT, INC.

P.O. Box 4129 • 7609 Colonel Glenn • Little Rock, Arkansas 72214-4129  
(501) 562-6295 • In Ark. 1-800-482-9484 • Out of Ark. 1-800-233-1335

THE PRICE INCLUDES COMPLETE INSTALLATION, DIRECT MOUNT  
HYDRAULIC PUMP, "HOT" SHIFT PTO FOR ALLISO 4500 RDS  
TRANSMISSION, MIDFLAPS, D.O.T. LIGHTING FOR THE DUMP BODY,  
OSHA SAFETY BODY PROP, BACKUP ALARM AND GREY PAINT PER  
SPECIFICATIONS. THE PRICE IS FIRM FOR 180 DAYS PROVIDED A  
PURCHASE ORDER IS ISSUED BY 02/28/2019.

ACCEPTED. The above prices, specifications and conditions are satisfactory and  
are hereby accepted. You are authorized to do the work as specified. Payment  
will be made as outlined above. Please refer to Quotation Number when placing  
your order.

FOR RESALE

QUOTE TOTAL: \$ 40,470.00

Date of Acceptance: \_\_\_\_\_

Firm: \_\_\_\_\_

By: \_\_\_\_\_

*Albert J. Meru*

Title: Road Department, Two Tri Axle Dump Trucks  
 Bid Number: SC-1901  
 Opening: 1-18-19, 2PM  
 OPR:

**BID WORKSHEET**

	Bid#1	Bid#2	Bid#3	Bid#4	Bid#5	Bid#6	Bid#7
<b>Vendor</b>	Peterbuilt	Carco International	Doggett Freightliner	Shibley Motor			
<b>Total</b>	\$ 323,654.00	\$ 267,500.00	\$ 261,145.00	\$ 268,555.30			
<b>Trade in value for both</b>	\$ 50,000.00	\$ 37,000.00	\$ 30,000.00	\$ 43,000.00			
<b>Individual Price</b>	\$ 161,827.00	\$ 133,750.00	130,573	\$ 134,277.65			
<b>BID TOTAL</b>	\$ 273,654.00	\$ 193,500.00	\$ 231,145.00	\$ 225,555.30			
<b>Date/Time Bid Received</b>							
<b>Exceptions to Specs</b>	no	no	no	yes			
<b>Signed</b>	yes	yes	yes	yes			
<b>Delivery Time</b>	9/31/2019	approx 110 days	June 2019	Oct-19			
<b>Warranty</b>	3 years	3 years	3 years	3 years			
<b>Bid Bond</b>							

**Exceptions**  
 Front Tire Size. The size we have available that most closely meets spec is 315/80R22.5L the wanted tire size was 385/65R22.5